

MAGNOS E compact

The economical introduction to magnetic clamping technology

Hand in hand for tomorrow



MAGNOS PROMOTION

MAGNOS E compact

Everything you need, for a small budget, for medium & large workpieces



Pole extension for any workpiece geometry

MAGNOS square pole technology is the ideal clamping solution for powerful cutting processes. It can be used with any system and offers energy-efficient, process-capable clamping for all common milling, grinding, and machining centers.

Fixed and movable pole extensions ensure that the magnetic chuck locating surface can be perfectly adjusted to the workpiece, thus ensuring deformation-free clamping. Using the pole extensions, the workpiece can be fully machined from 5 sides in just one operation.



MAGNOS control unit KSS-EC 01

The control unit KSS-EC 01 can be used to control a magnetic chuck. The magnetic chucks only require a short pulse for clamping and releasing. This is achieved via simple actuation via a hand-held remote control.

MAGNOS control unit KEH-EC 04

The control unit KEH-EC 04 can be used to control up to four magnetic chucks. Using the connection box facilitates easy installation. The magnetic chucks only require a short pulse for clamping and releasing. This is achieved via actuation on the hand remote control. On the control unit, the individual magnetic chucks can be selected using the switches. In addition, the KEH-EC 04 offers the option of machine integration via the PLC connection.



The benefits at a glance


- + **The economical entry into magnetic clamping technology** with MAGNOS E compact
- + **5-sided workpiece machining in one set-up**
Higher accuracy by setting up once and optimal accessibility of the machine spindle
- + **No deformation** due to gentle workpiece clamping
- + **Shortest possible set-up times and a resulting increase in productivity**
- + **Clamping within a few seconds**
- + **Increase in tool life and process capability**

MAGNOS E compact in comparison

Characteristics	MAGNOS E compact	MAGNOS standard chucks
Patented status display for clamping status	no	yes
Holding force	max. 3,925 kN per pole	max. 3,925 kN per pole
Height of the magnetic chuck	52 mm	66 mm
Mechanical rigidity/stability	++	+++
Regrindability of the magnetic chuck	3 mm	5 mm
Accessory pole extensions	+	+++
VERO-S interface Modular control unit	no	yes
Easy replacement of spare parts	no	yes
Plastic coating on the cable	+	+++
Optional: fixed cable connection	no	yes
Optional: drill holes suitable for machine table	no	yes
Optional: connection block in a different position	no	yes
Expansion technology	no	yes
Visual display	no	yes
MAG-DEMAG status	no	yes

+++ excellent ++ very good + good

Equipped by SCHUNK



CNC universal milling machine

- Task:** Machining hardened rings made of X37 CrMoV5-1
Solution: Magnetic chucks of type MFR-A1 1000 x 600 x 66 mm, pole size 50 x 50 mm
Advantage: Reduction in production times by approx. 60%, vibration-free clamping



CNC universal milling machine

- Task:** Face milling steel plates ST 52
Solution: 2 magnetic chucks of type MFR-A1 750 x 480 x 66 mm pole size 50 x 50 mm. Additional 60 pole extensions 50 x 50 mm, controlled in parallel
Advantage: Plane parallelism < 0.02 mm along a length of 1.2 m due to vibration-free clamping. Optimum 5-side accessibility and savings on set-up time of 30%



Vertical machining center


- Task:** Machining large plates
Solution: 4 magnetic chucks of type MFR-A1 800 x 500 x 66 mm, pole size 50 x 50 mm
Advantage: Grinding operations no longer necessary due to flatness of < 0.05 mm over the length of 1.4 m



Horizontal machining center

- Task:** Machining a medium sized cast angle (GG25)
Solution: Magnetic chucks of type MFR-A2 600 x 400 x 85 mm, pole size 50 x 50 mm
Advantage: 4-sided machining in one clamping, optimum access to the workpiece

Magnetic chucks

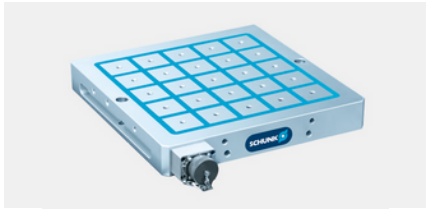

Designation	ID	L [mm]	B [mm]	H [mm]	Number of poles	Max. total holding force [kN]	Price [€]
MFR-EC-A1-050 370X370	46000431	370	370	52	25	98	2779
MFR-EC-A1-050 580X370	46000430	580	370	52	40	157	4099
MFR-EC-A1-050 800X370	46000432	800	370	52	50	196	5299
MFR-EC-A1-050 800X450	46000433	800	450	52	60	236	6599
MFR-EC-A1-050 980X580	1341759	980	580	52	84	330	10 489

Control unit for a magnetic chuck



Designation	ID	L [mm]	B [mm]	H [mm]	Connection	Price [€]
KSS-EC-01 460V/60Hz	422611	300	150	77	1x 4-PIN	1599

- No PLC connection
- Comes with remote and cable

Control unit for four magnetic chucks with connection box



Designation	ID	L [mm]	B [mm]	H [mm]	Connection	Price [€]
KEH plus 04 460V/60Hz	420662	400	300	120	4x 4-PIN	3499

- with connection box for installation
- PLC connection possible
- Selecting each magnetic clamping plate to control unit possible
- Remote and cable need to be added

SPECIAL PRICING

Limited time. Please ask for details.

Pole extensions



Designation	ID	Description	Price [€]
1x PVF-EC 50-32	0422391	Fixed pole extension, 50 x 50 x 32 mm with a through bore and screw M8	19.99
1x PVB-EC 50-32	0422392	Flexible pole extension, 52 x 45 x 32 mm with a through bore and screw M8, stroke 5 mm to compensate for workpiece unevenness	59.99

+CSA Approval \$2000 Fee



Test the new MAGNOS App

Makes everyday work easier with MAGNOS magnetic chucks thanks to the simple calculation of holding forces – **test 6 months for free now**

It's that easy:

Send an email with the following information: Company name, first and last name, function, e-mail address, language (DE / EN / FR / ES / IT).
To: magnetspanntechnik@de.schunk.com

You will then receive your free access for 6 months by email.